


# TREK-V

2 Stage Independent Leg

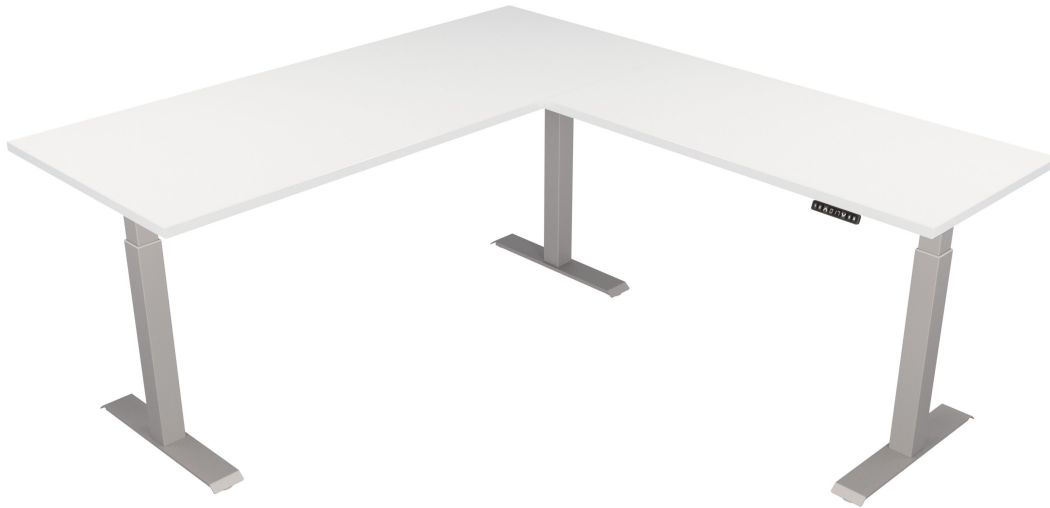

## TREK V 2 STAGE Independent top supports

- Height range- 2 stage 27.25-46.95 (calculated with 1.25" thick work surface)
- 2 leg base structure fits tops 30"-72" wide, tops over 60" require external anti sag bar
- 3 leg frame structure to work with up to 72" x 72" footprint, requires an external anti sag bar and mending plates for top joint
- Foot depth of 22" fits both 24" and 30" deep tops
- Premium Gyro controlled anti collision programming
- 3 position programmable memory hand control with added programming features
  - Program preset positions, choose between 1 touch and hold down button feature
  - Set low and high position stops to avoid object interference with pedestals or overhead storage
- Weight rating 220 lbs for 2 leg and 300 3 leg
- Speed 1.4" per second, with whisper quiet motors
- Individual motor in the top of each column
- 100-240V, low standby power consumption
- Warranty - 5 years on electronics and 10 years on structural components
- UL Certified
- Available in Silver and Black



TREK-V-2S-2L-24T -

TREK-V-2S-3L-24T -

EASB-49 -External anti sag bar 49" long,

\*\*Needed on 3 leg table joints and all tops over 60"W